

Home ■ [Produits](#) ■ [Réseaux d'assainissement, traitement des eaux pluviales](#) ■ [Traitement des eaux mixtes](#) ■  
[HUBER Storm Screen ROTAMAT® RoK2 for stormwater discharges](#)

## HUBER Storm Screen ROTAMAT® RoK2 for stormwater discharges



Automatically cleaned screen for solids retention in stormwater tanks and overflows

- Efficient solids separation
- Continuous automatic screen cleaning
- Defined solids removal
- For discharges with limited upstream head possibilities
- Sturdy, low-maintenance stainless steel design

The inverted upward flow storm screen HUBER ROTAMAT® RoK2 belongs to a group of fine screens designed for high flow rates at an extremely low hydraulic resistance.

During and after storm events large amounts of debris are discharged to streams, rivers and lakes through storm water overflows of combined and sanitary sewer systems. Particularly endangered receiving water courses and nature preservation areas require more extensive measures concerning the treatment of stormwater.

The inverted upward flow storm screen ROTAMAT® RoK2 is the ideal solution for this task, whether for new structures or refurbishment. Twodimensional screening guarantees a very high solids retention combined with automatic, gentle cleaning of the perforated plate.

RoK2 screens are horizontally installed before the downstream side of overflow weirs. A screw flight is mounted on a half cylinder of perforated plate. As the stormwater flows down to up through the horizontal perforated half-pipe of the screen trough the solids are retained. A screw, with a brush attached on ist flights, rotates within the semi-circular screen trough. It cleans the screen and pushes the screenings gently towards the end of the trough. At the end of the trough, the screenings are returned into the sewer and carried to the wastewater treatment plant. During storm conditions the screen is automatically started and then works fully automatically.

## Avantages

The screen is installed in front of the weir overflow. This design results in the following favourable benefits:

- Optimal solids retention by means of twodimensional screening (perforated plate)
- Screenings remain on the polluted water side
- No downstream impact on the screen efficiency
- For problem-free retrofitting into existing structures
- The perfect solution for discharges with limited upstream head possibilities
- Possibility of completely submerging the screen


## Downloads

 [Brochure: ROTAMAT® Storm Screen for stormwater discharges RoK 2 \(anglais\)](#) [pdf, 371 KB]

## Références

- [HUBER Technology's innovative, risk free, proven & versatile CSO / stormwater screening solutions](#)
- [Recommendations for combined water screening at structures with overflow](#)
- [Optimised stormwater overflow tank functions at Kappern/Austria](#)

## Design Sketch

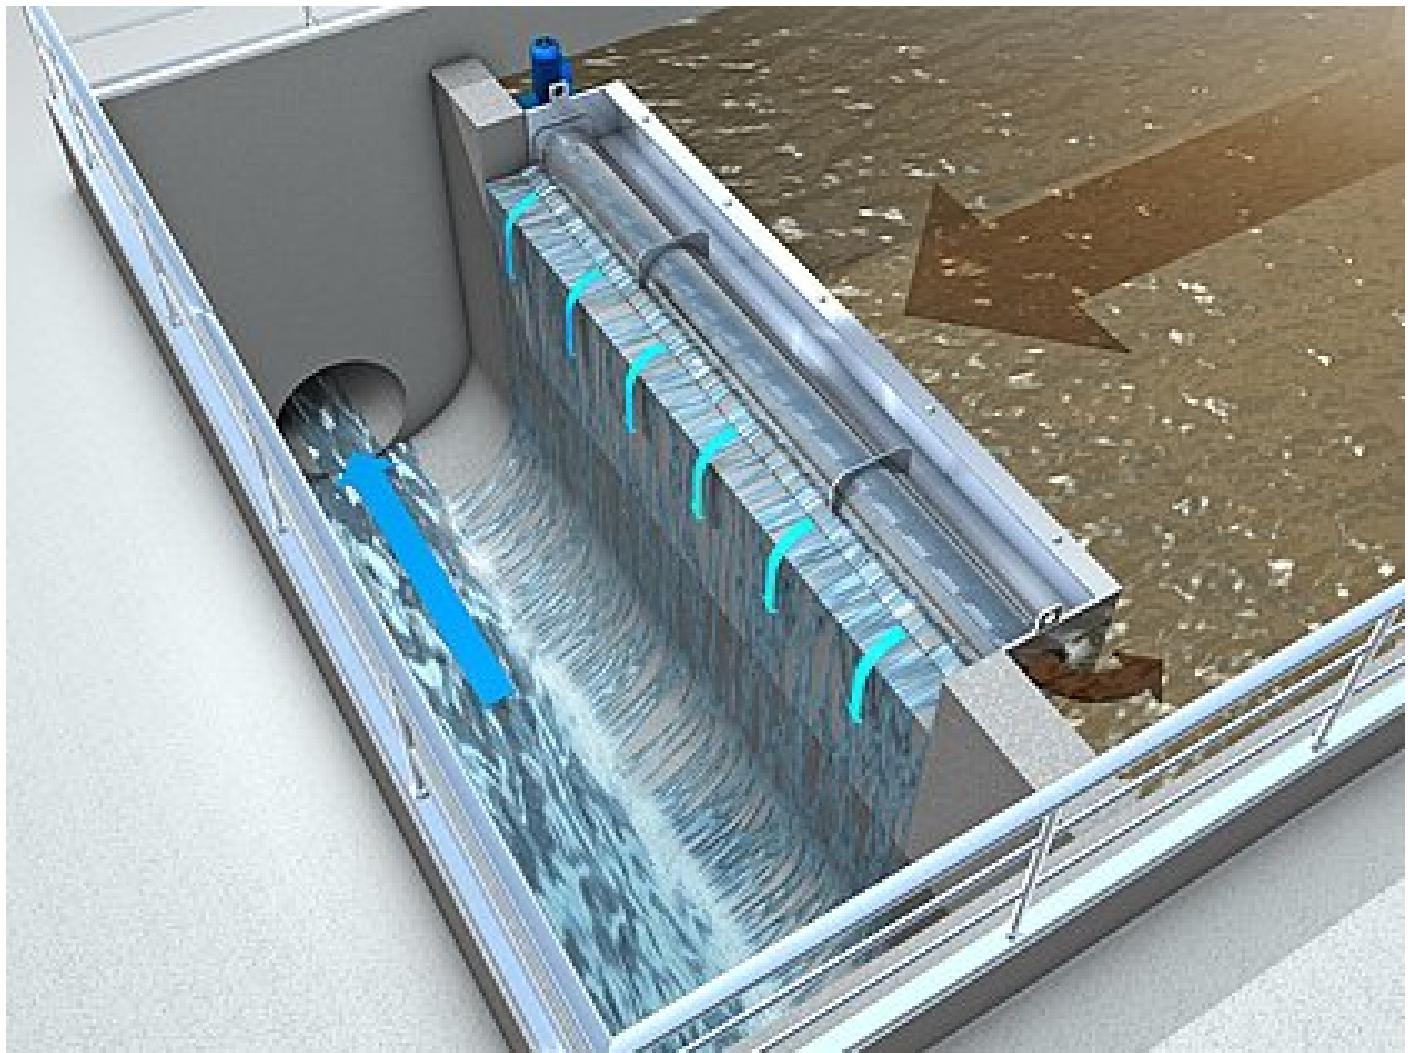

## Media



Animation: HUBER Storm Screen ROTAMAT® RoK2 for stormwater discharges with integrated weir  
[https://www.youtube.com/watch?v=\\_Rx4RVe3Si4](https://www.youtube.com/watch?v=_Rx4RVe3Si4)



Animation: Screening for high water flows with HUBER screens - animation  
<https://www.youtube.com/watch?v=eX4CKg7I3zw>

## Produits annexes de la même gamme Traitement des eaux mixtes

- HUBER Dégrilleur ROTAMAT® RoK1 pour surverses d'orage

S.à r.l. au capital de 75 000 EUR – RCS Colmar B389416231 – APE 4669B – Siret 389 416 231 00030 – N° TVA FR 08 389 416 231

Adresse :  
 10 A allée de l'Europe  
 67140 BARR  
 FRANCE

Télécopie :  
 + 33 (0) 3 88 08 14 98  
 e-mail : [info@huber.fr](mailto:info@huber.fr)  
 internet : [www.huber.fr](http://www.huber.fr)

Téléphone administration : + 33 (0) 3 90 57 49 10  
 Téléphone commercial : + 33 (0) 3 88 08 51 52  
 Téléphone réalisation : + 33 (0) 3 88 08 59 60  
 Téléphone SAV : + 33 (0) 3 90 57 49 09

BNP PARIBAS : BIC BNPAFRPPSTR  
 IBAN FR76 3000 4004 8700 0100 0723 125  
 CIC BANQUE CIAL : BIC CMCIFRPP  
 IBAN FR76 3008 7330 8000 0428 2740 114